


# HK Series / Test Point for Auto Insertion


## Test Point for Auto Insertion [ HK-2 Series ] (3.2x1.6 type) (1000pcs/reel) **PAT**

- In the case of reflowing by cream solder, recommended mounting land diameter should be more than 1.6x3.2 to strengthen the bonding
- Material.....Brass
- Finish..... HK-2-G .....Plated Au over Ni base  
HK-2-S .....Plated Sn over Ni base


| N/O    | Package   |
|--------|-----------|
| HK-2-G | 1000/reel |
| HK-2-S | 1000/reel |




### ■ Recommended Land Diameter



### ■ Dimintions

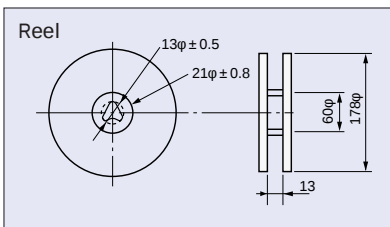

### Tape


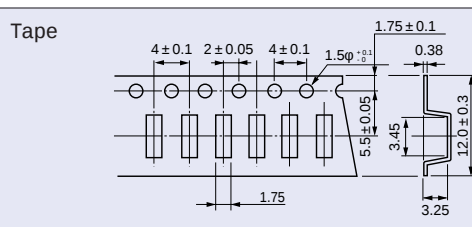


## Test Point for Auto Insertion [ HK-3 Series ] (2x1.25 type)


**PAT**

- Best use for small equipments.
- In the case of reflowing by cream solder, recommended mounting land diameter should be more than 2x1.25 to strengthen the bonding.
- Material.....Brass
- Finish..... HK-3-G .....Plated Au over Ni base  
HK-3-S .....Plated Sn over Ni base


| N/O      | Package      |
|----------|--------------|
| HK-3-G-T | 1500pcs/reel |
| HK-3-G   | 1000pcs/bulk |
| HK-3-S-T | 1500pcs/reel |
| HK-3-S   | 1000pcs/bulk |




### ■ Recommended Land Diameter



### ■ Dimintions

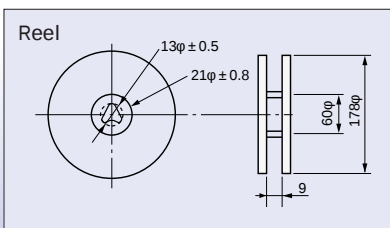

### Tape

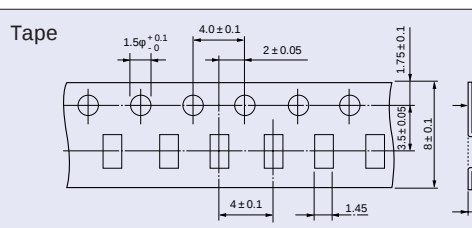

**MAC8** No.1 distributor of MAC8  
**SHINDENKIZAI Co., LTD.**  
 Contact  
 e-mail: sdk@mac8sdk.co.jp FAX: +81-3-3253-5965



[http://www.mac8sdk.co.jp/index\\_e.html](http://www.mac8sdk.co.jp/index_e.html)

# HK Series / Test Point for Auto Insertion


## Test Point for Auto Insertion [ HK-4 Series ] (1.2X1.0 type)

- In the case of reflowing by cream solder, recommended mounting land diameter should be more than 1.3x1.1 to strengthen the bonding.
- Can hook oscilloscope on the hole
- Material.....Brass
- Finish..... HK-4-G..... Plated Au over Ni base  
HK-4-S..... Plated Sn over Ni base


| N/O      | Package           |
|----------|-------------------|
| HK-4-G-T | 3000pcs/reel      |
| HK-4-G   | bulk 1000pcs/pack |
| HK-4-S-T | 3000pcs/reel      |
| HK-4-S   | bulk 1000pcs/pack |




### Recommended Land Diameter



### Dimensions

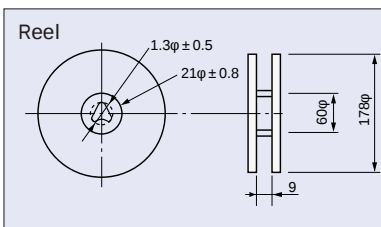

### Tape

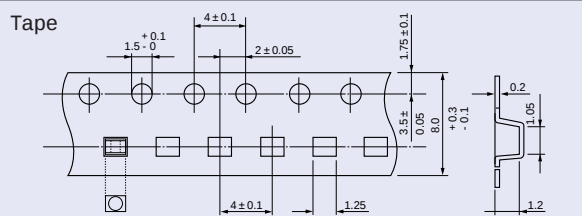


## Test Point for Auto Insertion [ HK-5 Series ]


PAT

- In the case of reflowing by cream solder, recommended mounting land diameter should be more than 1.25x2.5 to strengthen the bonding.
- Size: 2.5x3.0
- Operating Temperature..... - 40 ~ + 150°C
- Material  
Pin .....Phosphor Bronze 0.2t  
Plastic Part .....Fluorine Resin(UL94V-0)
- Finish..... HK-5-G..... Plated Au over Ni base  
HK-5-S..... Plated Sn over Ni base
- Color: Black, Brown, Red, Orange, Yellow, Green, Blue, Purple, Gray, White


| N/O       | Package        |
|-----------|----------------|
| HK-5-G□   | 1000/reel      |
| HK-5-S□   | 1000/reel      |
| HK-5-G-B□ | Bulk 1000/pack |
| HK-5-S-B□ | Bulk 1000/pack |

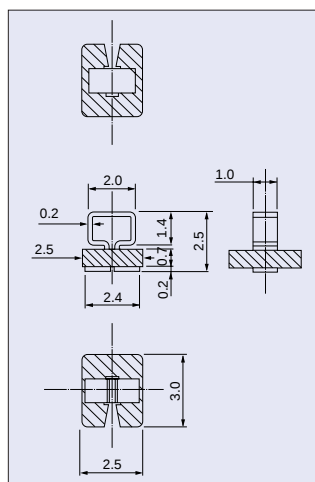


### Recommended Land Diameter



### Dimensions

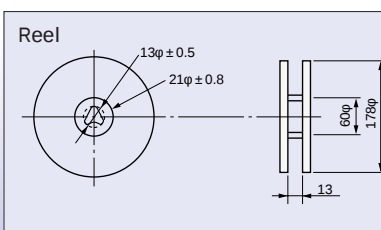

### Tape

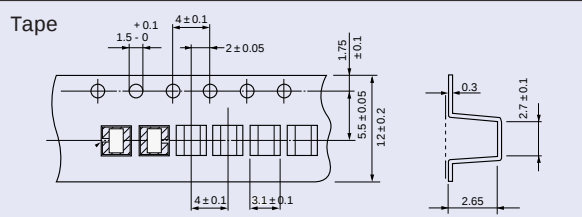

**MAC8**

No.1 distributor of MAC8

**SHINDENKIZAI Co., LTD.**

Contact

e-mail: sdk@mac8sdk.co.jp FAX: +81-3-3253-5965

[http://www.mac8sdk.co.jp/index\\_e.html](http://www.mac8sdk.co.jp/index_e.html)