



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00605	Connector, 4 pin M5 socket, 5xL14.5mm, gold plated, molding style, solder cup, IP67	1	
2	30-00495	Wire, 3C TS, 28 AWG, 150V, 70C, 2.8 mm, spiral shield, TPU, WBL	1	original component only
3	24-00263	Overmold, M5, 6xL22 mm	1	TPU, black
4	Heat shrink	black	1	covers stripped wire end
5	Heat shrink	black	1	covers shield

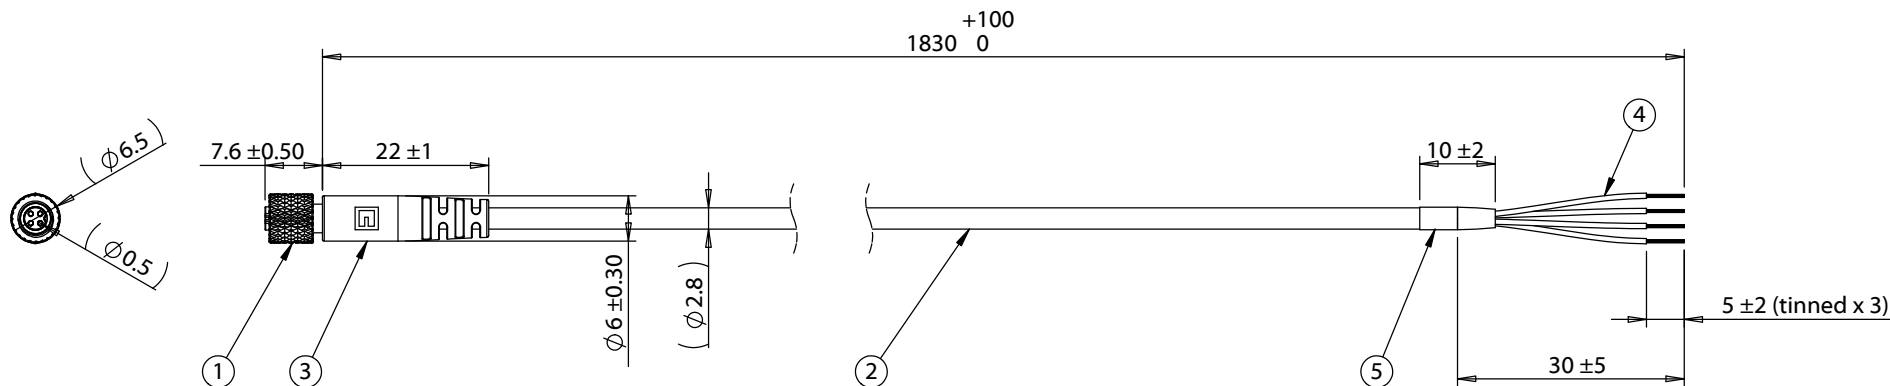

Front View
Not to Scale

Notes:
Functionally equivalent components may be substituted

IP67 waterproof rating when mated with corresponding (IP67) connector

Cable rated for 60 V, 1.0 A

Wiring Diagram	
50-00605	wire color
1	red
2	white
3	black
4	shield

Revision:	Date:	Description:	Prepared:	Notes: RoHS and REACH compliant Function test: no open, no short circuit, no intermittent	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	09/14/2018	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 5x0.5 mm 4C 50-00605 M5 socket to 5 mm tinned, 28 AWG, 30-00495 wire, IP67	Size: A Part number: 10-03015
					Scale: 1:1 Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com