



Item no.	282-881	GTN / EAN	4044918396096
Content	1 piece	Order unit	piece
Order quantity	25 piece	Increase in order quantity	(25, 50, 75, 100, ...)
Customer item no.		Customs Tariff no.	85369010000
Customs duty for the country of origin	DE	Available	-
List price	On request	Net price	On request
Availability	On request		


Note: Some items may not be available from your local WAGO company.
Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS ☒ Compliant



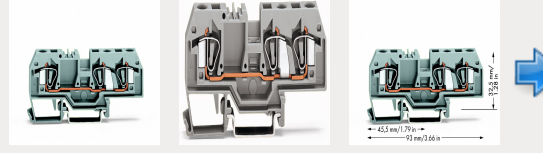





Article details		
Approvals	Downloads/Certificates	Accessories
3-conductor through terminal block		
Description		
Remarks		
Item properties		
Miscellaneous		
Name	Value	Unit
Packaging type	BOX	
Rating per	IEC/EN 60947-7-1	
Rated voltage (III / 3) [V]	800	V
Rated impulse voltage (III / 3) [kV]	8	kV
Rated current [A]	41	A
Legend (ratings)	(III / 3) ≤ Overvoltage category III / Pollution degree 3	
Type of wiring	Front-entry wiring	
Total number of connection points	3	
Total number of potentials	1	
Number of levels	1	
Connection technology	CAGE CLAMP®	
Actuation type	Operating tool	
Connectable conductor materials	Copper	
Solid conductor	0.2 ... 6 mm² / 24 ... 10 AWG	
Fine-stranded conductor	0.2 ... 6 mm² / 24 ... 10 AWG	
Strip length	12 ... 13 mm / 0.47 ... 0.51 inch	
Width	8 mm / 0.315 inch	
Height from upper-edge of DIN-35 rail	32.5 mm / 1.28 inch	
Depth	83 mm / 3.661 inch	
Design	horizontal	
Type of mounting	Center rail 35 x 15	
Marking level	Center marking	
Color	gray	
Insulating material	Polyamide 66 (PA 66)	
Fine load [mJ]	0.339	mJ
Weight [g]	21.37	g
Main product function	Through term. block	
Product type	Through rail-mount term. blocks	

Upwards