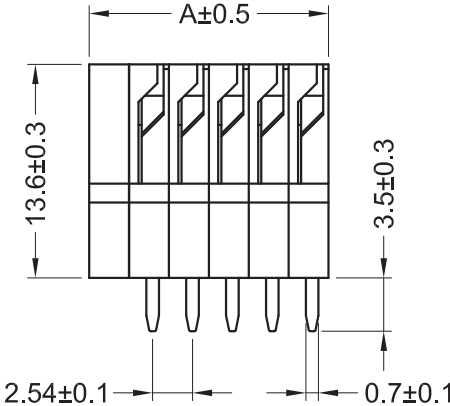
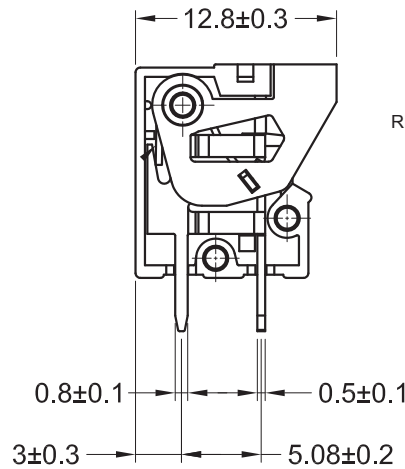
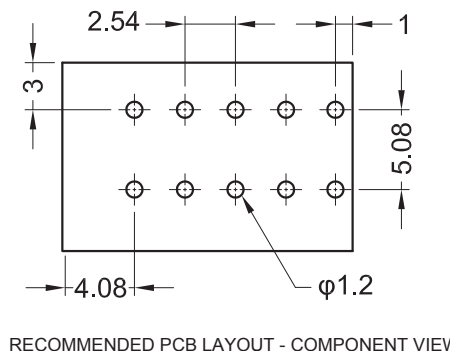
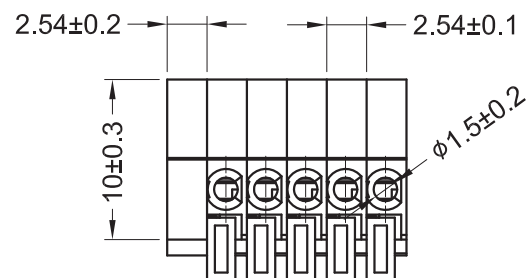



1				2				3				4				5			
												TECHNICAL CHARACTERISTICS MATERIAL INSULATOR: PA 66 FLAMMABILITY RATING: UL94-V0 COLOR: GREEN/ORANGE WIRE GUARD: STAINLESS STEEL CONTACT: BRASS SOLDER TAIL PLATING: TIN ENVIRONMENTAL OPERATING TEMPERATURE: -40°C UP TO 115°C COMPLIANCE: LEAD FREE AND ROHS ELECTRICAL CURRENT RATING: 6A WORKING VOLTAGE: 150 VAC WITHSTANDING VOLTAGE: 2.0 KV CONTACT RESISTANCE: 20 mΩ max STANDARD  CERTIFIED E315414 MECHANICAL SOLID WIRE: 26-20 AWG / 0.129-0.518 MM² STRANDED WIRE: 26-20 AWG / 0.129-0.518 MM² WIRE STRIPE LENGTH: 9-10 MM PITCH: 2.54 MM SOLDERING: JEDEC LEAD FREE WAVE SOLDERING PROCESS PACKAGING BOX DIMENSION A = 2.54 x NB PINS + 2.54							
																			
RoHS Compliant				PROJECTION: 				GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15											
G				APPROVAL: FBr				UNIT: MM				DESCRIPTION: SERIE 4039 B - 2.54MM SCREWLESS VERTICAL ENTRY - WR-TBL				SIZE A4			
F								SCALE:											
E								SHEET: 1/2											
D	09-JUN-15	LAYOUT REVIEW	AK					DRAW: AS											
C	12-NOV-14	GENERAL UPDATE	AS																
B	29-JUL-13	DWG REVIEW	QL																
A	02-JUL-12	PDF	GG					WERI PART NO: 691 403 900 0xx B											
REV	DATE	FILE	BY																

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[691403900002B](#)