


D1® for LabelManager™

Find the right label for the right application

DYMO® D1® Standard labels for hundreds of tasks around the office or home office, such as filing, storage and asset tracking.


- ▶ 'Easy Peel' for trouble-free application
- ▶ Wide range of colours and sizes available
- ▶ Adheres to most clean and flat surfaces
- ▶ Temperature rating: -18°C to 90°C



Files



Identification

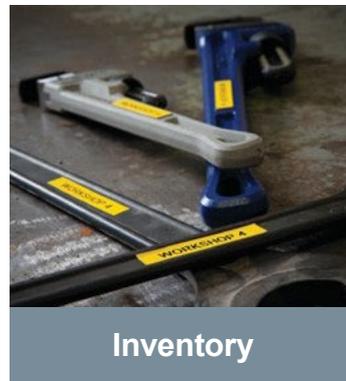

Inventory



Shelving and Draws



Flat Surface



UV Resistant



Water Resistant



Oil Resistant



Temperature: -18° C to 120 C

COLOUR	6 mm	9 mm	12 mm	19 mm	24 mm
D1 STANDARD LABELS (7 m)					
ABC	S0720780	S0720680	S0720530	S0720830	S0720930
ABC	S0720770	S0720670	S0720500	S0720820	S0720920
ABC	S0720790	S0720730	S0720580	S0720880	S0720980
ABC	-	S0720710	S0720560	S0720860	-
ABC	-	S0720740	S0720590	S0720890	-
ABC	-	S0720720	S0720570	S0720870	S0720970
ABC	-	-	S0720610	S0720910	S0721010
ABC	-	S0720690	S0720540	S0720840	-
ABC	-	-	S0720510	-	-
ABC	-	-	S0720600	-	-
ABC	-	S0720700	S0720550	S0720850	-
ABC	-	-	S0720520	-	-
D1 STANDARD MULTIPACKS (10 x D1 - 7m Length)					
ABC	-	2093096	2093097	2093098	-



100% recycled material used for external cassette



DYMO® high quality labels are made in Belgium



Reach compliant



RoHS compliant


DYMO®

DURABLE LABELS




Find the right label for the right application

- ▶ Industrial strength adhesive helps to ensure labels stay stuck to a variety of surfaces
- ▶ Indoor/outdoor water-resistant design withstands UV light, heat, humidity, household cleaners and near freezing conditions
- ▶ Scratch- and tear-resistant material helps ensure text stays legible
- ▶ Temperature rating: -40°C to 80°C




Inventory

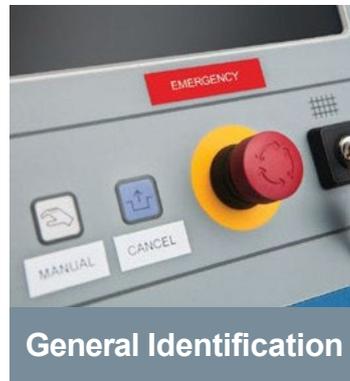

General Identification



Outdoor

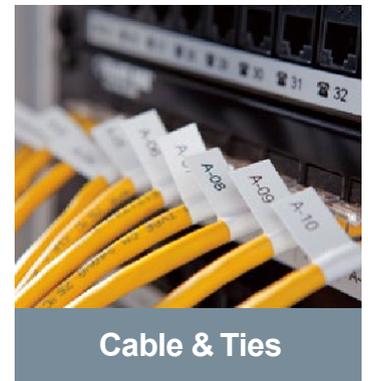

Cable & Ties

COLOUR	12 mm					19 mm				
D1 DURABLE LABELS (3 m)	Flat Surface	Textured Surface	Cable/Wire	UV Resistant	Water Resistant	Oil Resistant	Chemical Resistant	Temperature: -40° C to 80° C		
ABC									-	
ABC									-	
ABC									-	
D1 DURABLE LABELS (5.5 m)	Flat Surface	Textured Surface	Cable/Wire	UV Resistant	Water Resistant	Oil Resistant	Chemical Resistant	Temperature: -40° C to 80° C		
ABC									-	
D1 PERMANENT POLYESTER (5.5 m)	Flat Surface	Textured Surface		UV Resistant	Water Resistant	Oil Resistant	Chemical Resistant	Temperature: -40° C to 80° C		
ABC									S0718060	S0718050
D1 FLEXIBLE NYLON (3.5 m)	Curved Surface		Cable/Wire	UV Resistant				Temperature: -40° C to 60° C		
ABC									S0718040	S0718070

Applications						
Filing	Shelving	Inventory	Outdoor Recreation	Break/Storage room	Workshop	Wiring & Cable
✓	✓	✓	✓	✓	✓	✓



100% recycled material used for external cassette



DYMO® high quality labels are made in Belgium



Reach compliant



RoHS compliant

DYMO®

This information is being provided for general information purposes and the compliance standards and certifications referenced herein are based on current standards which are subject to change.

newell BRANDS



© 2022 Newell Brands

D1® Multipacks

Find the right label for the right application

DYMO® D1 Standard Label Multipack for hundreds of tasks around the office or home office, such as filing, storage and asset tracking.

- ▶ 'Easy Peel' for trouble-free application
- ▶ Wide range of colours and sizes available
- ▶ Adheres to most clean and flat surfaces
- ▶ Temperature rating: -18°C to 90°C

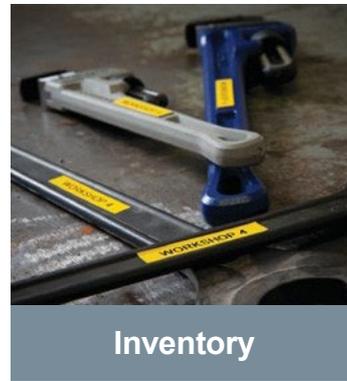

Example	Label Type	Description	Material	SKU	EAN	QTY
	D1®	Black on White 9mm x 7m	Plastic	2093096	3026980930967	10
		Black on White 12mm x 7m	Plastic	2093097	3026980930974	10
		Black on White 19mm x 7m	Plastic	2093098	3026980930981	10



100% recycled material used for external cassette



DYMO® high quality labels are made in Belgium



Reach compliant



RoHS compliant