
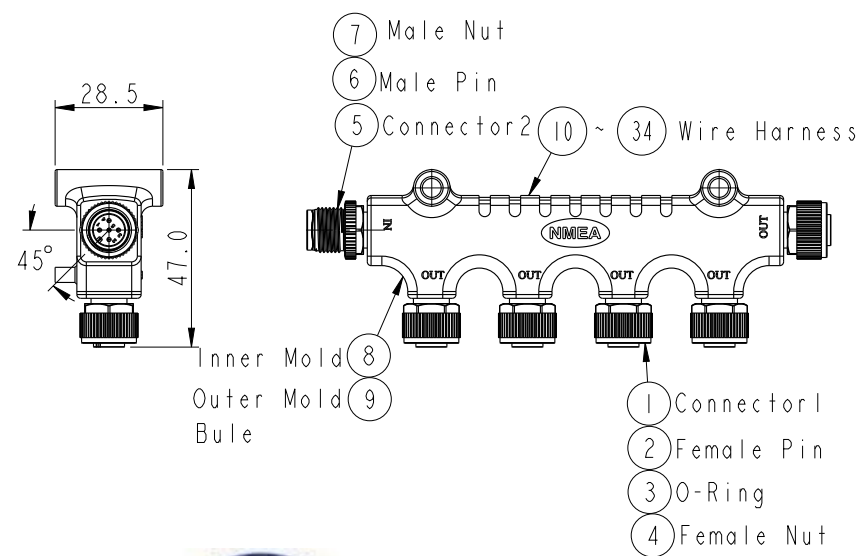



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION


ALTW
CONFIDENTIAL
2016-01-05
R&D DEPT.

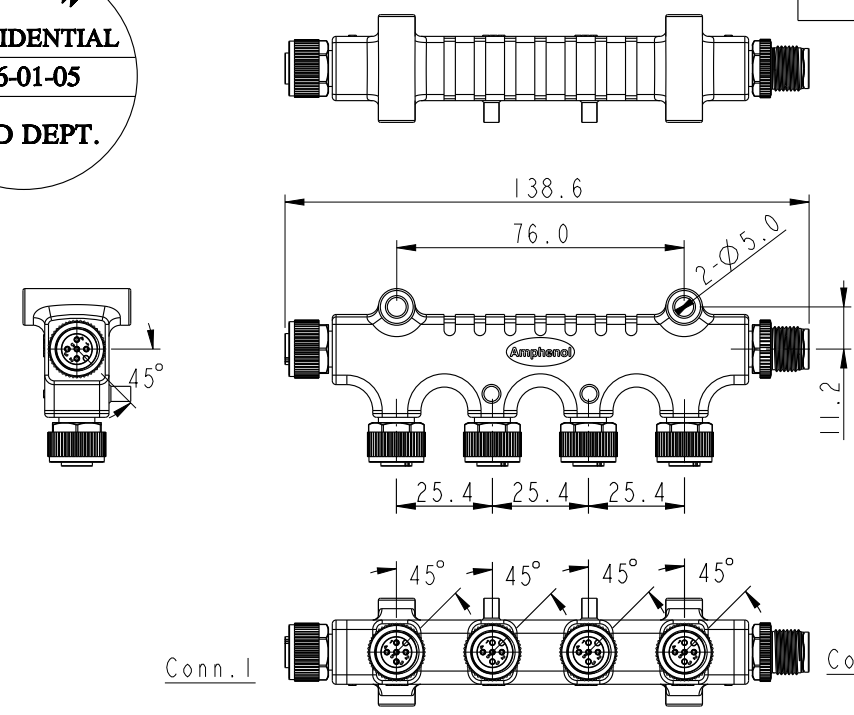

ALTW
DCC. DEPT.
CONFIDENTIAL
2016.03.31
ISSUED



Conn.1&2&3&4&5
Pin Assignments
Front View



Conn.6
Pin Assignments
Front View

Blue 藍	5	5	5	5	5	5
White 白	4	4	4	4	4	4
Black 黑	3	3	3	3	3	3
Red 紅	2	2	2	2	2	2
Green 綠	1	1	1	1	1	1
Wire Color	Conn.1	Conn.2	Conn.3	Conn.4	Conn.5	Conn.6
Pin Out						

Note:
* Important Dimension To Check.
* Waterproof Rate: IP68
In 1 meter water within 24 hours
* Connector: Pu, Black
* Nut: PA66, Black
* Pin: Copper Alloy, Gold Plated 30u"
* Wire Harness: UL1061, 22AWG
* Body: PU, Blue

UNIT:mm		TOLERANCE ±0.50mm		TITLE NMEA2000 Micro-C 4-WAY TEE		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO P-555555-FFFFFM-S001	DRAWN BY Cary	DATE 2016-01-05
SCALE 1:2		SIZE A4		SHEET 1 OF 1		DWG NO P-555555-FFFFFM-S001		CHECKED BY Yulong	DATE 2016-01-05	
REV. A		WC-REV. A.1		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Jerry	DATE 2016-01-05	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[P-555555-FFFFFM-S001](#)