

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 2,00 | 3,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,45 - 3,25
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 2,00		2,58	200	1,70	0,05	2,60	0,10	3,20	0,10	3,60	0,10
1005 3,00		3,13	250	2,10	0,05	2,65	0,10	3,30	0,10	3,80	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

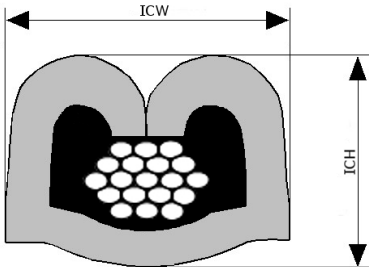

Terminal Part Number: 15304724

Surface Plating: SN

Material Thickness [mm]: 0,30

Cross Section [mm²]: 0,80 | 1,00 | 2,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 1005 + 1005

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80 + 1005 2,00		2,03 + 2,58	90	1,90	0,05	2,60	0,10	3,80	0,10	3,80	0,10
1005 1,00 + 1005 1,00		2,23 + 2,23	120	1,80	0,05	2,60	0,10	3,70	0,10	3,80	0,10

Cable type code legend:

1005:


Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN



Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 2,00 | 3,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,85 - 3,81
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 2,00		2,98	200	1,70	0,05	2,60	0,10	3,20	0,10	3,60	0,10
1007 3,00		3,63	250	2,10	0,05	2,65	0,10	3,60	0,10	4,10	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

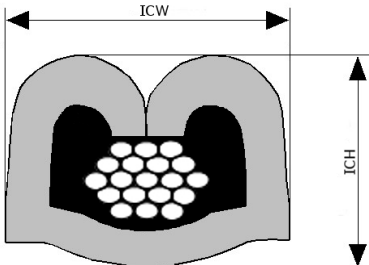

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304724
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 1,50 | 2,00 | 2,50 | 3,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,00 - 3,40
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 1,50		2,20	200	1,60	0,05	2,60	0,10	3,20	0,10	3,65	0,10
2010 2,00		2,46	195	1,65	0,05	2,85	0,10	3,30	0,10	3,55	0,10
2010 2,50		2,80	250	1,90	0,05	2,60	0,10	3,40	0,10	3,70	0,10
2010 3,00		3,10	240	2,05	0,05	2,75	0,10	3,70	0,10	3,80	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR
 (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B
 Industry Designator: DIN
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,
 XLPE/PVDF, XLPVC
 Insul. Wall Designator: THIN

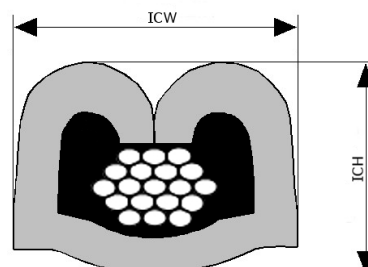

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50 | 0,75 | 1,00 | 1,50 | 2,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010 + 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,75 + 2010 0,75		1,75 + 1,75	148	1,55	0,05	2,80	0,10	2,80	0,10	3,60	0,10
2010 0,75 + 2010 1,50		1,75 + 2,20	70	1,65	0,05	2,85	0,10	3,50	0,10	3,65	0,10
2010 1,00 + 2010 1,00		1,95 + 1,95	158	1,65	0,05	2,80	0,10	3,25	0,10	3,60	0,10
2010 2,50 + 2010 0,50		2,80 + 1,50	75	2,10	0,05	2,65	0,10	3,70	0,10	3,80	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

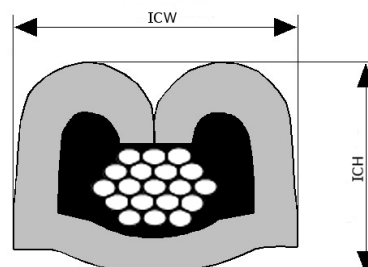

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 2,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2013
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,50 - 2,80
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2013 2,00		2,65	180	1,70	0,05	2,60	0,10	3,40	0,10	3,70	0,10

Cable type code legend:

2013:

Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PUR, PVC, SYNTHRESIN, XLPE, XLPE/PVDF
Insul. Wall Designator: THIN

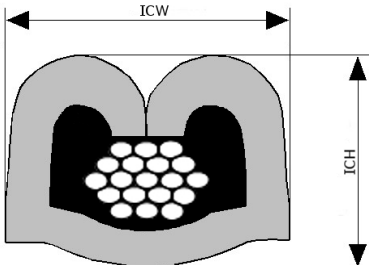

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 1,50 | 2,00 | 2,50 | 3,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2044
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,10 - 3,30
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2044 1,50		2,25	200	1,60	0,05	2,60	0,10	3,25	0,10	3,65	0,10
2044 2,00		2,58	230	1,70	0,05	2,60	0,10	3,10	0,10	3,65	0,10
2044 2,50		2,83	250	1,90	0,05	2,60	0,10	3,20	0,10	3,70	0,10
2044 3,00		3,18	300	2,05	0,05	2,60	0,10	3,30	0,10	3,70	0,10

Cable type code legend:

2044: A3Z, F3Z, FL RENAULT A3Z
Industry Designator: NRA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPA/PVDF, XLPE, X-POLY ZH
Insul. Wall Designator: THIN

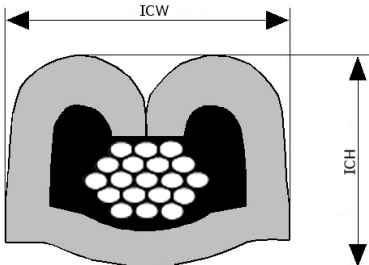

Terminal Part Number: 15304724

Surface Plating: SN

Material Thickness [mm]: 0,30

Cross Section [mm²]: 0,50 | 1,00 | 1,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2044 + 2044

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2044 0,50 + 2044 1,00	TOP	1,50 + 1,96	80	1,60	0,05	2,60	0,10	3,60	0,10	3,80	0,10
2044 1,50 + 2044 1,50	TOP	2,25 + 2,25	200	2,05	0,05	2,60	0,10	3,95	0,10	3,80	0,10

Cable type code legend:

2044: A3Z, F3Z, FL RENAULT A3Z



Industry Designator: NRA

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: XLPA/PVDF, XLPE, X-POLY ZH

Insul. Wall Designator: THIN

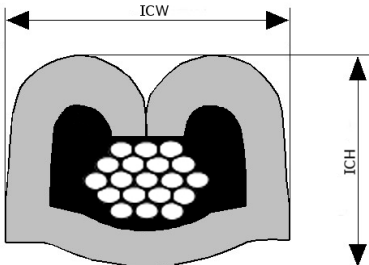

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 2,00 | 3,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2045
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,60 - 3,30
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2045 2,00		2,70	230	1,70	0,05	2,60	0,10	3,10	0,10	3,65	0,10
2045 3,00		3,20	300	2,05	0,05	2,60	0,10	3,30	0,10	3,70	0,10

Cable type code legend:

2045: FLR9Y
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PP
Insul. Wall Designator: THIN

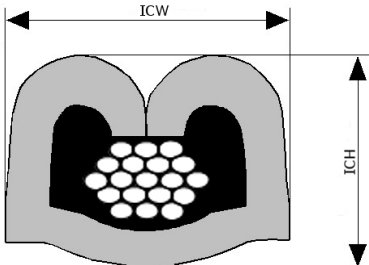

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304724
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 1,50 | 2,00 | 2,50 | 3,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2055
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 2,10 - 3,30
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2055 1,50		2,18	200	1,60	0,05	2,60	0,10	3,05	0,10	3,75	0,10
2055 2,00		2,38	230	1,70	0,05	2,60	0,10	3,10	0,10	3,75	0,10
2055 2,50		2,80	250	1,90	0,05	2,60	0,10	3,20	0,10	3,80	0,10
2055 3,00		3,15	300	2,05	0,05	2,60	0,10	3,30	0,10	3,80	0,10

Cable type code legend:

2055: AGP0119, RENAULT F3Z
 Industry Designator: NRA
 Conductor Material: COPPER
 Conductor Plating: NONE
 Insul. Material: POLYOLEFIN
 Insul. Wall Designator: THIN

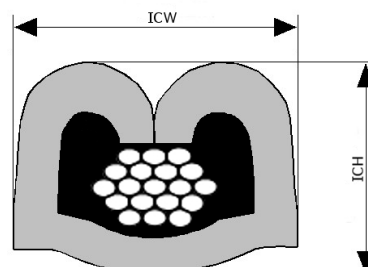

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,50 | 1,00 | 1,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2055 + 2055
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2055 0,50 + 2055 1,00	TOP	1,50 + 1,93	80	1,60	0,05	2,60	0,10	3,50	0,10	3,70	0,10
2055 1,50 + 2055 1,50	TOP	2,18 + 2,18	200	2,05	0,05	2,65	0,10	3,80	0,10	3,85	0,10

Cable type code legend:

2055: AGP0119, RENAULT F3Z
Industry Designator: NRA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN
Insul. Wall Designator: THIN

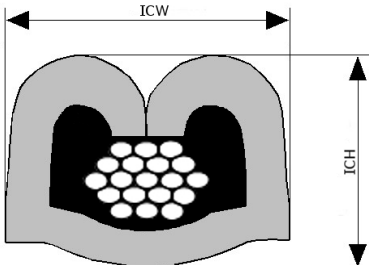

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 3,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 3002
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 3,40 - 3,80
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3002 3,00		3,60	240	2,10	0,05	2,65	0,10	3,90	0,10	3,90	0,10

Cable type code legend:

3002:
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPVC
Insul. Wall Designator: REGULAR

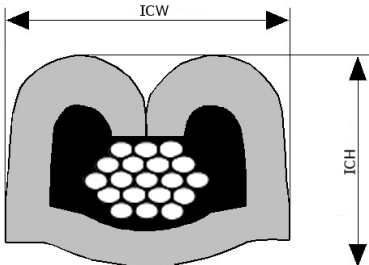

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 2,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 3003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,50 - 2,80
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3003 2,00		2,65	180	1,70	0,05	2,65	0,10	3,30	0,10	3,70	0,10

Cable type code legend:

3003: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, X-PVC
Insul. Wall Designator: THIN

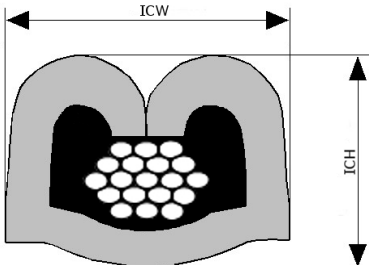

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,85

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 3003 + 3003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3003 0,85 + 3003 0,85		1,80 + 1,80	90	1,65	0,05	2,60	0,10	3,60	0,10	3,30	0,10

Cable type code legend:

3003: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, X-PVC
Insul. Wall Designator: THIN

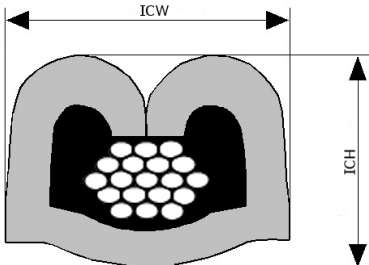

Terminal Part Number: 15304724
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 1,25

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 3004
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,20
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 1,25		2,10	135	1,50	0,05	2,60	0,10	3,10	0,10	3,60	0,10

Cable type code legend:

3004: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE, X-PVC
Insul. Wall Designator: THIN

