

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,40
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80 / 15366066		2,03	90	1,25	0,05	2,05	0,10	4,30	0,10	5,00	0,10
1005 1,00 / 15366066		2,23	120	1,40	0,05	2,10	0,10	4,40	0,10	5,00	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

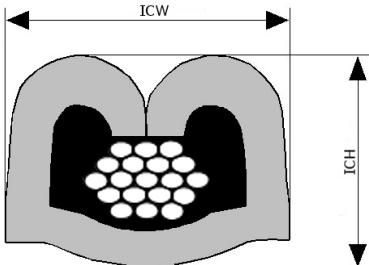

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*


Cable Type codes: 1005
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 1,85 - 2,20
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80 / 15366066		2,03	90	1,25	0,05	2,05	0,10	4,30	0,10	5,00	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

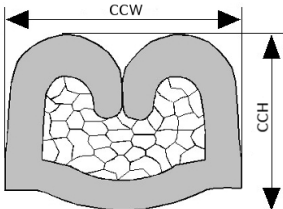

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,70
Seal(s): 15366066 | 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80 / 15366066		2,33	90	1,25	0,05	2,05	0,10	4,25	0,10	5,10	0,10
1007 1,00 / 15366067		2,58	120	1,40	0,05	2,10	0,10	4,40	0,10	5,00	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

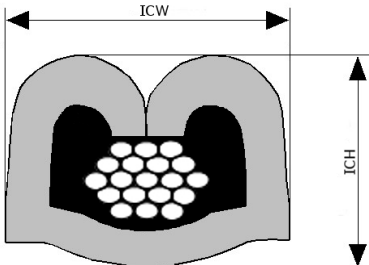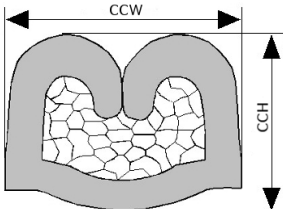

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1007
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 2,45 - 2,70
Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 1,00 / 15366067		2,58	120	1,40	0,05	2,10	0,10	4,40	0,10	5,00	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

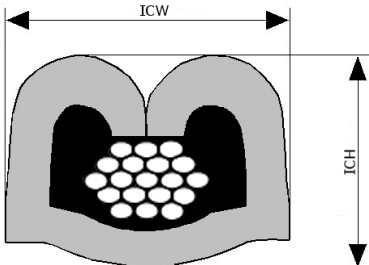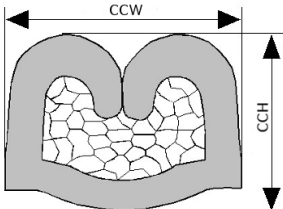

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1009
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,50 - 3,43
Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,80 / 15366067		2,78	90	1,25	0,05	2,05	0,10	4,40	0,10	4,90	0,10
1009 1,00 / 15366067		3,17	120	1,40	0,05	2,10	0,10	4,80	0,10	4,90	0,10

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

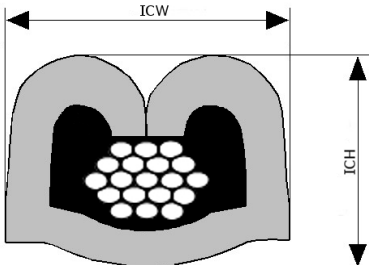

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1009
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ [mm]: 2,50 - 3,05
Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,80 / 15366067		2,78	90	1,25	0,05	2,05	0,10	4,40	0,10	4,90	0,10

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

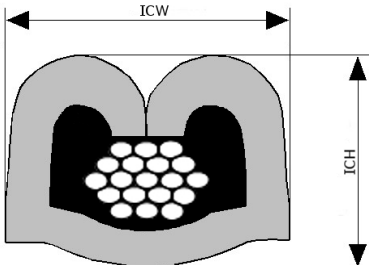

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1019
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 1,90
Seal(s): 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1019 0,80 / 15366065		1,80	90	1,25	0,05	2,05	0,10	4,30	0,10	4,90	0,10

Cable type code legend:

1019:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN SPECIAL

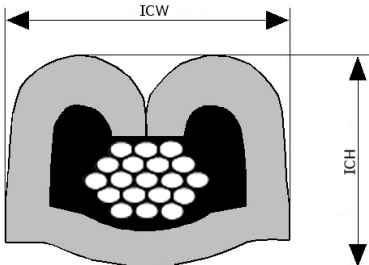

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1056
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,18
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1056 0,80 / 15366066		2,02	90	1,25	0,05	2,00	0,10	3,90	0,10	5,00	0,10

Cable type code legend:

1056:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NI
Insul. Material: FLUORPOLYM, PTFE
Insul. Wall Designator: THIN

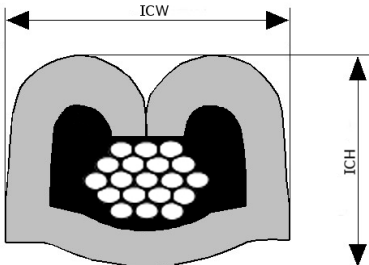

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1069
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,09 - 2,25
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1069 1,00 / 15366066		2,17	120	1,35	0,05	2,10	0,10	4,10	0,10	5,00	0,10

Cable type code legend:

1069:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: ETFE
Insul. Wall Designator: THIN

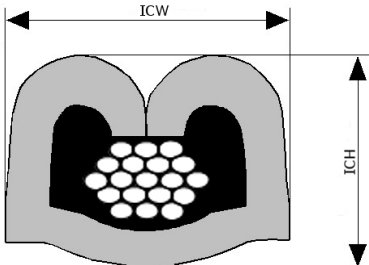

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1094
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,90 - 3,15
Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 1,00 / 15366067		3,03	120	1,40	0,05	2,10	0,10	4,80	0,10	4,90	0,10

Cable type code legend:

1094:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

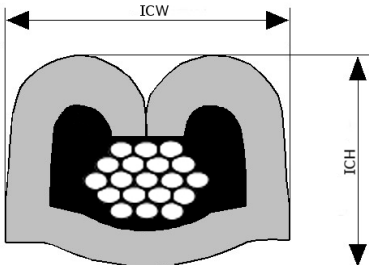

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,75

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,10 - 2,50
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2003 0,75 / 15366066		2,30	85	1,25	0,05	2,05	0,10	4,40	0,10	5,00	0,10

Cable type code legend:

2003: FL4G
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: EVA, PVC
Insul. Wall Designator: REGULAR

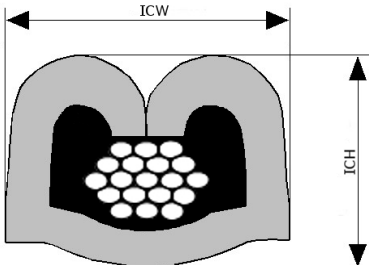

Crimp Information Sheet

DELPHI

Terminal Part Number: 15304719
 Surface Plating: SN
 Material Thickness [mm]: 0,30
 Cross Section [mm²]: 0,75 | 1,00 | 1,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,60 - 2,40
 Seal(s): 15324985 | 12191233 | 15366066 | 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,75 / 15366065		1,75	120	1,25	0,05	2,10	0,10	4,60	0,10	4,60	0,10
2010 0,75 / 15324985		1,75	120	1,25	0,05	2,10	0,10	4,15	0,10	4,60	0,10
2010 0,75 / 12191233		1,75	120	1,25	0,05	2,10	0,10	4,60	0,10	4,65	0,10
2010 1,00 / 15324985		1,95	160	1,40	0,05	2,10	0,10	4,35	0,10	4,65	0,10
2010 1,00 / 12191233		1,95	160	1,40	0,05	2,10	0,10	4,70	0,10	4,70	0,10
2010 1,00 / 15366066		1,95	160	1,40	0,05	2,10	0,10	4,70	0,10	4,65	0,10
2010 1,50 / 15366066		2,20	150	1,45	0,05	2,10	0,10	4,50	0,10	4,90	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

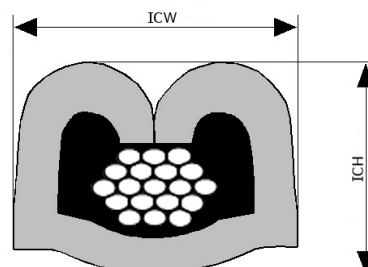

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,75 | 1,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2011
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,05 - 2,70
Seal(s): 15366067 | 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,75 / 15366066		2,28	85	1,25	0,05	2,05	0,10	4,30	0,10	5,00	0,10
2011 1,00 / 15366067		2,54	120	1,35	0,05	2,10	0,10	4,40	0,10	4,90	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: P/EST, PE, PVC, XLPE
Insul. Wall Designator: REGULAR

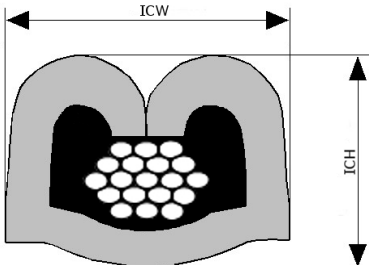

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,75 | 1,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2053
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 1,95
Seal(s): 15366066 | 15366065

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2053 0,75 / 15366065		1,70	120	1,30	0,05	2,10	0,10	4,50	0,10	4,60	0,10
2053 1,00 / 15366066		1,85	160	1,40	0,05	2,10	0,10	4,60	0,10	4,65	0,10

Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID
Industry Designator: PSA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN, X-POLY
Insul. Wall Designator: ID

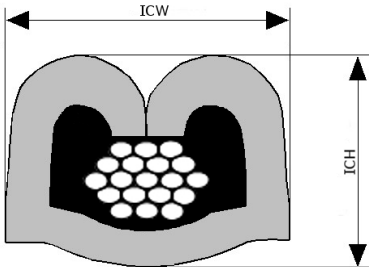

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,60 | 0,75 | 1,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2054
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 2,15
Seal(s): 15366065 | 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2054 0,60 / 15366065		1,83	90	1,25	0,05	2,10	0,10	4,40	0,10	4,60	0,10
2054 0,75 / 15366065		1,80	120	1,30	0,05	2,10	0,10	4,50	0,10	4,60	0,10
2054 1,00 / 15366066		2,07	160	1,40	0,05	2,10	0,10	4,60	0,10	4,65	0,10

Cable type code legend:

2054: PSA T2 IR, PSA T3 IR, PSA T3 ZH IR, PSA T4 LH IR
Industry Designator: PSA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN, PVC, X-POLY
Insul. Wall Designator: IR

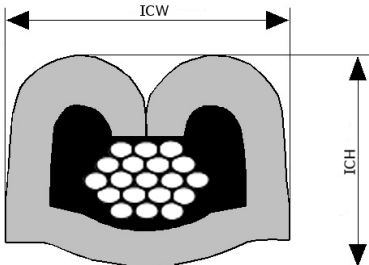

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,75 | 1,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2055
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 2,10
Seal(s): 12191233

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2055 0,75 / 12191233		1,70	120	1,25	0,05	2,10	0,10	4,30	0,10	4,60	0,10
2055 1,00 / 12191233		1,93	160	1,40	0,05	2,10	0,10	4,50	0,10	4,60	0,10

Cable type code legend:

2055: AGP0119, RENAULT F3Z
Industry Designator: NRA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN
Insul. Wall Designator: THIN

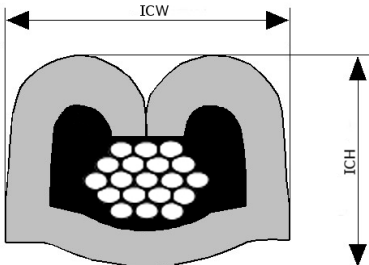

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,85

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 3003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 1,90
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3003 0,85 / 15366066		1,80	95	1,30	0,05	2,10	0,10	4,40	0,10	4,90	0,10

Cable type code legend:

3003: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, X-PVC
Insul. Wall Designator: THIN

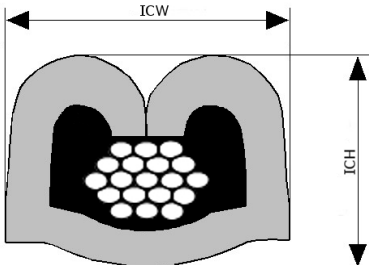

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,85 | 1,25

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 3004
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 2,20
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,85 / 15366066		1,80	95	1,30	0,05	2,10	0,10	4,40	0,10	4,90	0,10
3004 1,25 / 15366066		2,10	135	1,40	0,05	2,10	0,10	4,60	0,10	5,00	0,10

Cable type code legend:

3004: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE, X-PVC
Insul. Wall Designator: THIN

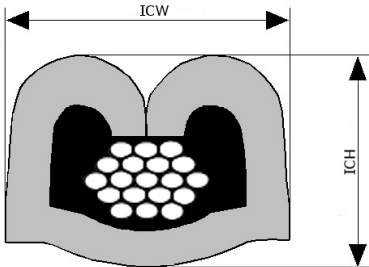

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 5002
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,10 - 2,18
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
5002 1,00 / 15366066		2,14	120	1,35	0,05	2,10	0,10	4,10	0,10	5,00	0,10

Cable type code legend:

5002:

Industry Designator: UL
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: ETFE
Insul. Wall Designator: REGULAR

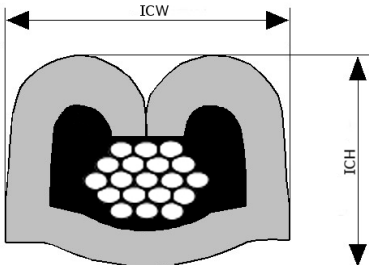

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,75 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 8000
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 2,10
Seal(s): 15366065 | 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,75 / 15366065		1,80	85	1,25	0,05	2,05	0,10	4,30	0,10	4,90	0,10
8000 1,00 / 15366066		2,00	120	1,35	0,05	2,10	0,10	4,40	0,10	4,90	0,10

Cable type code legend:

8000:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: SYNTHRESIN
Insul. Wall Designator: THIN

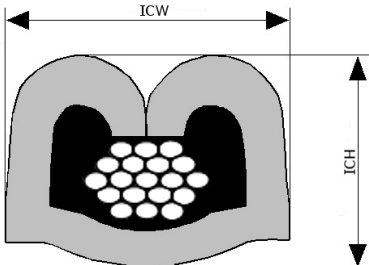

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 9001
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,15 - 2,31
Seal(s): 15366066

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9001 0,80 / 15366066		2,23	90	1,25	0,05	2,05	0,10	4,40	0,10	5,10	0,10

Cable type code legend:

9001:

Industry Designator: MISC
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVDF
Insul. Wall Designator: MIX

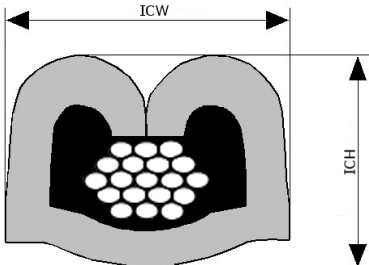

Terminal Part Number: 15304719
Surface Plating: SN
Material Thickness [mm]: 0,30
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 9002
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,51 - 2,72
Seal(s): 15366067

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9002 1,00 / 15366067		2,62	120	1,40	0,05	2,10	0,10	4,40	0,10	4,90	0,10

Cable type code legend:

9002:

Industry Designator: MISC
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVDF
Insul. Wall Designator: MIX

