

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2008
© COPYRIGHT 2008-2012 ALL RIGHTS RESERVED.


LOC	DIST
J	-


REVISIONS 変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	REVISED	17JUN2011	T.K	M.K
	C	REVISED	10AUG2012	T.K	M.K
	C1	REVISED	28OCT2015	T.K	M.K

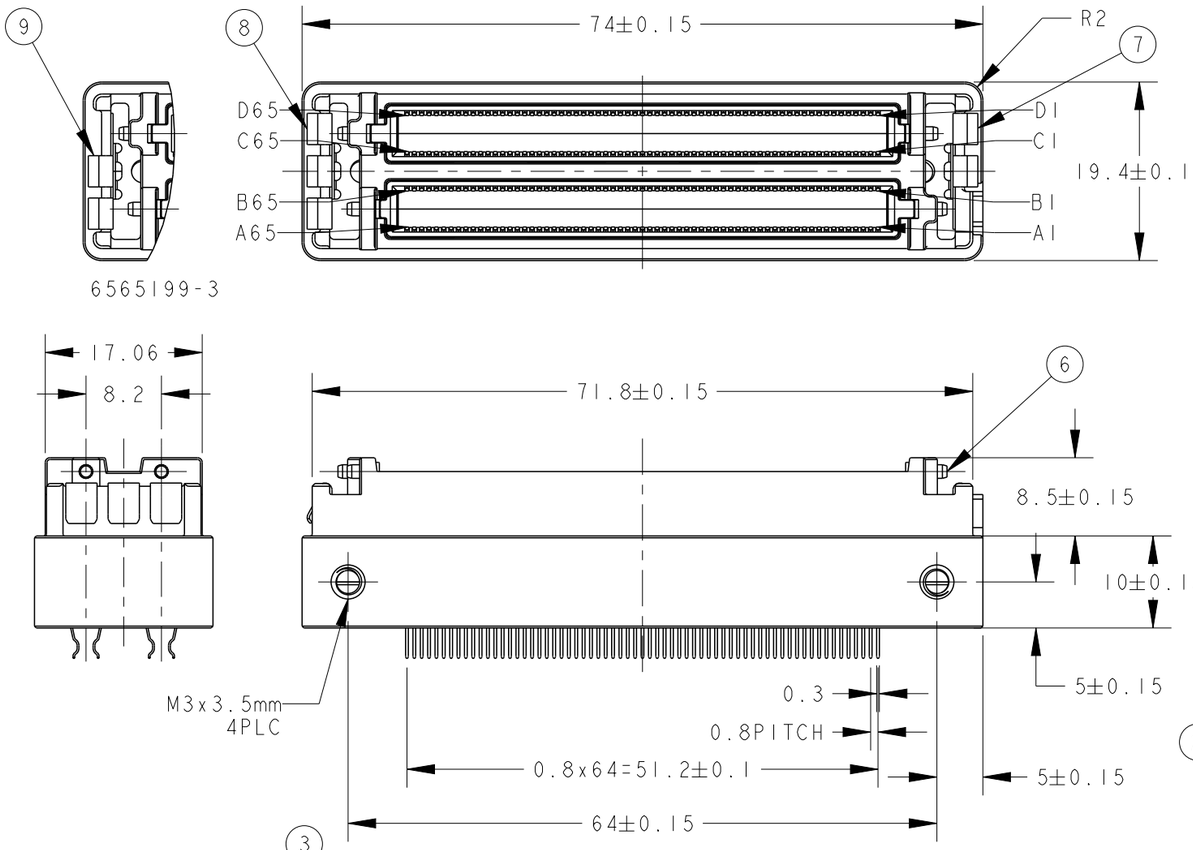

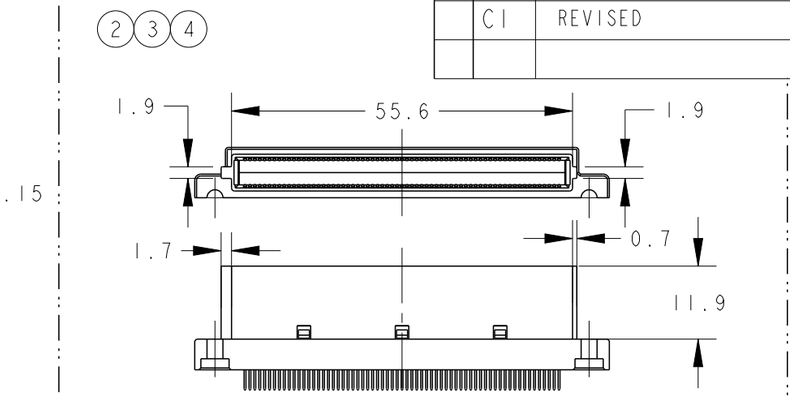

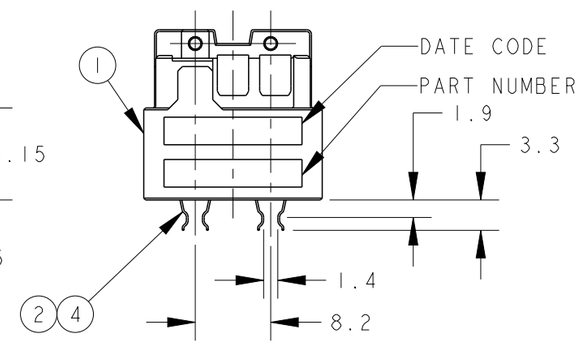

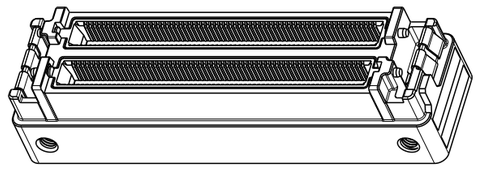

SCALE 1:1

1. MATING AREA
   0.001mm MIN GOLD
   OVER 0.0025mm MIN NICKEL
   SOLDERING AREA
   GOLD FLASH
   OVER 0.00127mm MIN NICKEL
   OTHERS
   0.00127mm MIN NICKEL

2. SHILED FINGER THICKNESS
   0.25mm

3. SHILED FINGER THICKNESS
   0.20mm

4. PIN ASSIGNMENTS
   AS A REFERENCE

RoHS COMPLIANT

QTY			FINISH	MATERIAL	NAME	ITEM NO
-3	-2	-1				
2	-	-	Ni PLT.	STAINLESS STEEL	3 SHIELD FINGER	9
-	1	-	Ni PLT.	STAINLESS STEEL	2 SHIELD FINGER	8
-	1	-	Ni PLT.	STAINLESS STEEL	2 SHIELD FINGER	7
4	4	4	Ni PLT.	STAINLESS STEEL	PIN FOR HOOK	6
2	2	2	ZINC PLATING	STEEL	M2.5 CAP SCREW	5
(260)	(260)	(260)	1	COPPER ALLOY	CONTACT	4
2	2	2	-	LCP	COVER HOUSING	3
4	4	4	-	LCP	INSERT MOLD,CONTACT	2
1	1	1	Ni PLT 0.0025~0.005mm	ZINC DIECAST	BASE HOUSING	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 粍 mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±0.3
1 PLC	±0.25
2 PLC	±0.2
3 PLC	±-
4 PLC	±-
ANGLES	±3

MATERIAL 材料 SEE TABLE

FINISH 仕上 SEE TABLE 1

DWN	T.Kanno 5MAR2007
CHK	M.Kimura 5MAR2007
APVD	M.Kimura 5MAR2007
PRODUCT SPEC 製品規格	108-5771
APPLICATION SPEC 取付適用規格	114-5505
WEIGHT	68.5g

TE Connectivity

NAME 名称: HDR ASSEMBLY
TC-ZIF CONN
0.8mm PITCH 260P

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3		C-6565199	-

CUSTOMER DRAWING | SCALE 尺度 1:1 | SHEET 1 OF 1 | REV C1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

6565199-2 6565199-3