
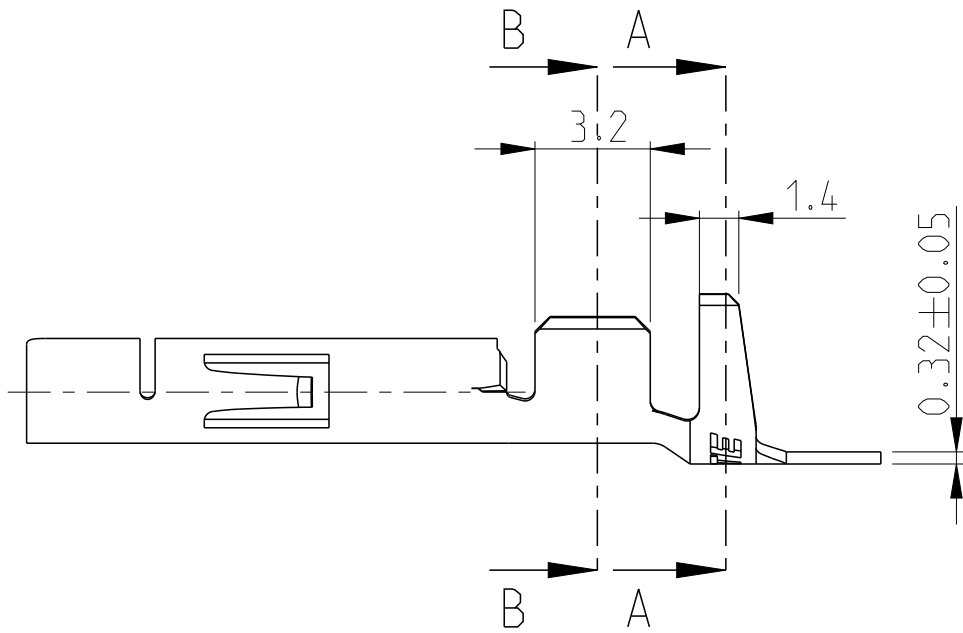
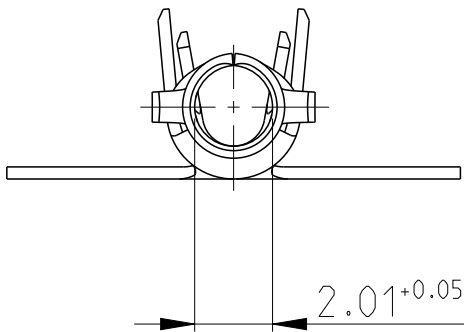
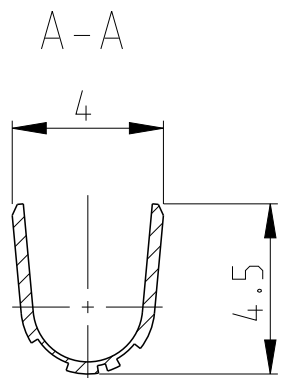


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	M6	REVISED PER ECR-18-010208	31JUL2018	BDA	SF

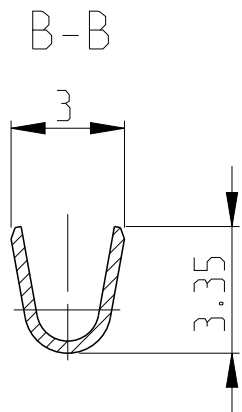

NOTES:

Bemerkungen:

- 1

2-6 µm Sn OVER Ni IN CRIMP-AREA
2-6 µm Sn über Ni in der Crimpzone
- 2

0.8 µm Au OVER Ni IN CONTACT-AREA
0.8 µm Au über Ni in der Kontaktzone
- 3

SUITABLE FOR Ø1.0-2.5mm
Für Isolations Ø1.0-2.5mm geeignet
- 4

0.8 µm Au OVER 1.3 µm Ni ON INSIDE OF WIRE BARREL AND CONTACT AREA
0.8 µm Au über 1.3 µm Ni in der Drahtcrimp und Kontaktzonen, sonst 1.3 µm Ni

	107-3, FIG.2		926882-8	BRASS	PRE-TIN
SUPERSEDED BY 350536-7	107-3, FIG.1	926893-7	926884-7	BRASS	<div><div>1</div><div>2</div></div>
SUPERSEDED BY 350536-6	107-3, FIG.1	926893-6	926884-6	PHOS BRONZE	<div><div>1</div><div>2</div></div>
OBSOLETED	107-3, FIG.1	926893-5	926882-5	COPPER ALLOY	PRE-TIN
OBSOLETED	107-3, FIG.1	926893-4	926882-4	COPPER ALLOY	PLAIN
	107-3, FIG.1	926893-3	926882-3	PHOS BRONZE	PRE-TIN
SUPERSEDED BY 350536-2	107-3, FIG.1	926893-2	926882-2	BRASS	<div><div>4</div></div>
	107-3, FIG.1	926893-1	926882-1	BRASS	PRE-TIN
	REELING	LOOSE PIECE	PART NO.	MATERIAL	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.Skoda	29NOV2005	<div><div><div>TE</div></div>TE Connectivity</div>	
		CHK R.Vlcek	-		
		APVD M.Bleicher	-		
		PRODUCT SPEC 108-1031			
		APPLICATION SPEC 114-18011		NAME UNIVERSAL MNL Socket 0.5-2.1 mm SQUARE WIRE RANGE	
		WEIGHT -		SIZE A3	CAGE CODE 00779
				DRAWING NO C-926882	RESTRICTED TO
CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1	REV M6

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC	±0.2
		1 PLC	±0.2
		2 PLC	±0.2
		3 PLC	±-
		4 PLC	±-
		ANGLES	±1°
MATERIAL SEE TABLE		FINISH SEE TABLE	

D

D

C

C

B

B

A

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[926882-1 \(Mouser Reel\)](#)