
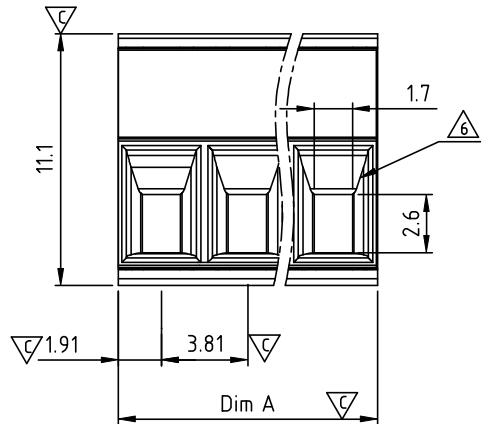


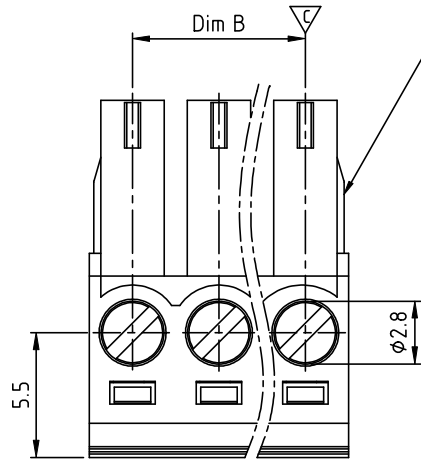


TJ xx 31x 3 xxxx G

Solid Block
02 2 CONTACTS
03 3 CONTACTS
...
24 24 CONTACTS

COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
9 White(RAL1102)
C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

0000 Standard @ Logo
000A Standard ANY Logo
0091 Standard ANY Logo
Any special item by customer request, please contact sales department.

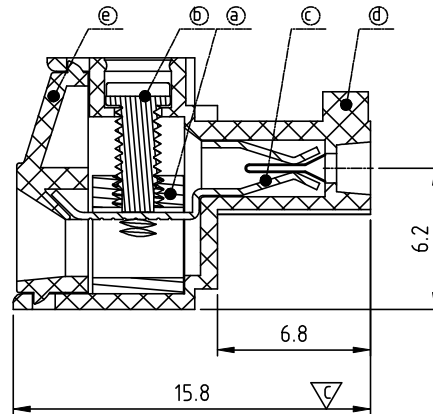

N = Number of poles
Dim A=Nx3.81
Dim B=(N-1)x3.81

Poles	Dim A	Dim B
2p	±0.15	±0.10
3P-6p	±0.15	±0.15
7P-12p	±0.20	±0.20
13P-18p	±0.25	±0.25
19P-24p	±0.30	±0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	11/01'05	Electrical standard changed.	Marvin
△	04/20'06	2p to 6p with wedge is changed.	Marvin
△	8/13'06	Added VDE standard	黎仁松
△	12/04'08	Add the tolerance table	Jacke
△	12/04'08	The temperature changed from -30°,105° to -40°,115°	Jacke
△	12/04'08	The wire entry hole was changed.	Jacke
△	2010.07.12	The solid and Stranded wire are changed from16-26 to16-28	Chen Bo
△	2010.07.12	Rrmove the CSA mark	Chen Bo
△	2012.06.04	The color is added	Chen Bo
△	07/06-15	Update the drawing	Evan

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item①Clamp: Brass(CuZn) Ni plated
- Item②Terminal screw: Steel Zinc plating "--" slot type
- Item③Female contact: PhBz ,Bright Tin plated over Nickel plated
- Item④Terminal (housing): Thermoplastic (UL94V-0)
- Item⑤Terminal (cover): Thermoplastic (UL94V-0)

Electrical cULus/VDE

- Voltage rating: 300VAC/300VAC
- Current rating: 10A/10.5A
- Wire range: 1.5mm²
- Solid wire(AWG): 16-28/16-26
- Stranded wire(AWG): 16-28/16-26
- Torque: 3Lb-In/0.2Nm
- Screw: M2
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval: us VDE
- Critical dimension:

**Amphenol
ANYTEK**

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TJ-3.81mm Series								
PART NO.	TJxx31x3xxxxG				DWG NO.	8TJ0601			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Evan 07/06-15	Chen Bo 05/28`12					UNIT: mm	X. ±0.50
				SHEET: 01/01	SCALE: NONE	X.X ±0.30			
					REV.: J	X.XX ±0.10			
						X° ±1°			

SHEET: 01/01 REV.: J